


SYN370 Fibre Optic Card Cage

The Synectics™ SYN370 maximises capacity and works seamlessly with a vast array of flexible fibre optic solutions. Designed to mount in standard 19" (483 mm) instrument racks for ease of integration with redundant power supply.

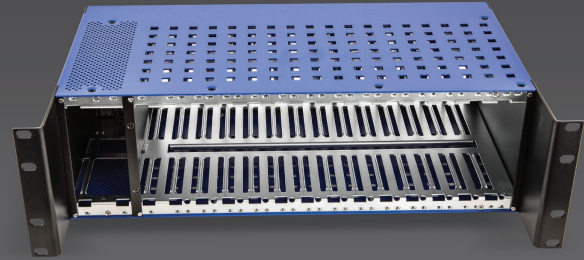

The SYN370 is a 19" 3RU high (132 mm) rack mounting chassis which accepts one power supply module (SYN921) plus from one to fourteen SYN standard card format plug-in modules.

The plug-in power supply (SYN921) is capable of providing power for any combination of plug-in cards.

Features

- 19" (483 mm) Rack Mountable
- 3U High Compact Design
- Capable of Holding up to 14 Fibre Optic Cards
- Single Plug-in Power Supply (SYN921) Included
- Universal 90 to 264VAC Power Input
- Capable of Powering any Combination of Cards

Options

- SYN370 Card Cage is Available with Redundant Power (See SYN350 Card Cage)

Specifications

ENVIRONMENTAL

| | |
|-----------------------|----------------------|
| Operating Temperature | -20°C to +75°C |
| Relative Humidity | 0-95% Non-condensing |

MECHANICAL

| | |
|------------------------|-------------------------------------|
| Material | Aluminium (Chassis) |
| Mounting | 19" 3RU High (132 mm) |
| Card Capacity | 14 x SYN Cards, 1 x SYN921 PSU Card |
| Dimensions (W x D x H) | 483 x 274.5 x 132 mm |

ELECTRICAL

| | | | |
|-------|--------------------|-----------|--------------|
| Pin 1 | NMS Address Line 0 | Pins 6, 7 | Ground |
| Pin 2 | NMS Address Line 1 | Pins 3 | +12V Nominal |
| Pin 4 | NMS Address Line 2 | Pins 5 | NMS Data + |
| Pin 8 | NMS Address Line 3 | Pins 9 | NMS Data - |

Synectic Systems

sales@synecticsglobal.com

synecticsglobal.com

Specifications subject to change. E & OE.

Copyright © Synectic Systems Group Limited, Synectic Systems, Inc., Synectic Systems (Asia) Pte. Limited 2015. All Rights Reserved.

MANUFACTURER OF



CAMERA STATIONS

Literature Reference: 03GF0410_2
SYN370/0715/A4 Iss 4